

ProLine

by RENOVA Lighting

Category: LED

ProLine Series

The ProLine Series Linear LED is a linear pendant mount fixture bringing superior optical capabilities to a 3" form factor with an integral driver. The ProLine3 pendant mount is designed to be specification grade with a wide range of beam options, high CRI, and color options. The ProLine3 also comes with a range of accessories, mounting options, and finishes that provide an easy route to customization and performance enhancements. The ProLine series provides an attractive, energy efficient architectural look which provides a comfortable, low glare, uniform lighting. Typical applications for this type of product are interior spaces where finished ceilings and walls exist. Applications Include:

- Commercial/Corporate Office Spaces
- Retail Spaces, Public Spaces and Airports
- Schools, Colleges and Universities
- Hospitals, Government Facilities and Military Bases

Prefix: PL3



project:

fixture type:

catalog #:

quantity:


ORDERING GUIDE

PREFIX/SERIES	SIZE	FINISH	END CAP	OPTIC DIRECT	CRI	COLOR TEMP.	DIRECT BEAM DIST.	DIRECT LUMEN OUTPUT	INDIRECT BEAM DIST.	INDIRECT LUMEN OUTPUT	DRIVER VOLTAGE	DRIVER	EM BACKUP	MOUNTING TYPE	CANOPY	POWER CORD
PL3-P																
PL2-3 ProLine Series 3" Pendant Mount	2 - 2ft 4 - 4ft 6 - 6ft 8 - 8ft 10 - 10ft CS - Custom Specify (X, Y)	MWH - Matte White MBK - Matte Black MGR - Matte Gray CAE - Clear Anodized Effect RAL - Specify RAL#	E1 - Flat	OFL - Flush Lens ORL - Regressed Lens OCRL - Continuous Regressed Lens	S80 - Std. 80 CRI S90 - Std. 90 CRI SUN - Full Sun Like	C27 - 2700 K C30 - 3000 K C35 - 3500 K C40 - 4000 K C50 - 5000 K	DLAM - Lambertian DBW60 - Batwing 60° DDA70 - Double Asymmetric 70° DA5025 - Asymmetric 50° at 25° Tilt L150 - 1,500 lm/ft LX_ - Specify lm/ft DM55 - Medium 55° DN40 - Narrow 40° CS_ - Custom Specify	L035 - 350 lm/ft L050 - 500 lm/ft L075 - 750 lm/ft L100 - 1,000 lm/ft L125 - 1,250 lm/ft L150 - 1,500 lm/ft LX_ - Specify lm/ft	NN - Not Needed ILAM - Lambertian IBW120 - Batwing 120° IFT150 - Flat Top 150° IA6040 - Asymmetric 60° at 40° Tilt IA4560 - Asymmetric 45° at 60° Tilt CS_ - Custom Specify	NN - Not Needed L035 - 350 lm/ft L050 - 500 lm/ft L075 - 750 lm/ft L100 - 1,000 lm/ft L125 - 1,250 lm/ft L150 - 1,500 lm/ft LX_ - Specify lm/ft	UNV - Universal Voltage (120v - 277v) 347 - 347V	FDND - Factory Non-Dimming FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FDDA - Factory DALI 0.1% Dim FDDX - Factory DMX Dim FDTR - Factory TRIAC Dim LD01 - Lutron Hi-Lume 1% Dim	NN - Not Needed EMC - Emergency Circuit EMB - Emergency Battery (10 W — Onboard)	DJ - Drywall / J-box Mnt T1 - 9/16" Flat T-bar Mnt T2 - 9/16" Bolt Slot T-bar Mnt T3 - 15/16" Flat T-bar Mnt	RCWH2 - 2" Round Canopy, White RCBK2 - 2" Round Canopy, Black RCWH5 - 5" Round Canopy, White RCBK5 - 5" Round Canopy, Black	S48WH - 48" White Canopy Kit S48BK - 48" Black Canopy Kit S96WH - 96" White Canopy Kit S96BK - 96" Black Canopy Kit



PL3 Dimensions

Prefix: PL3

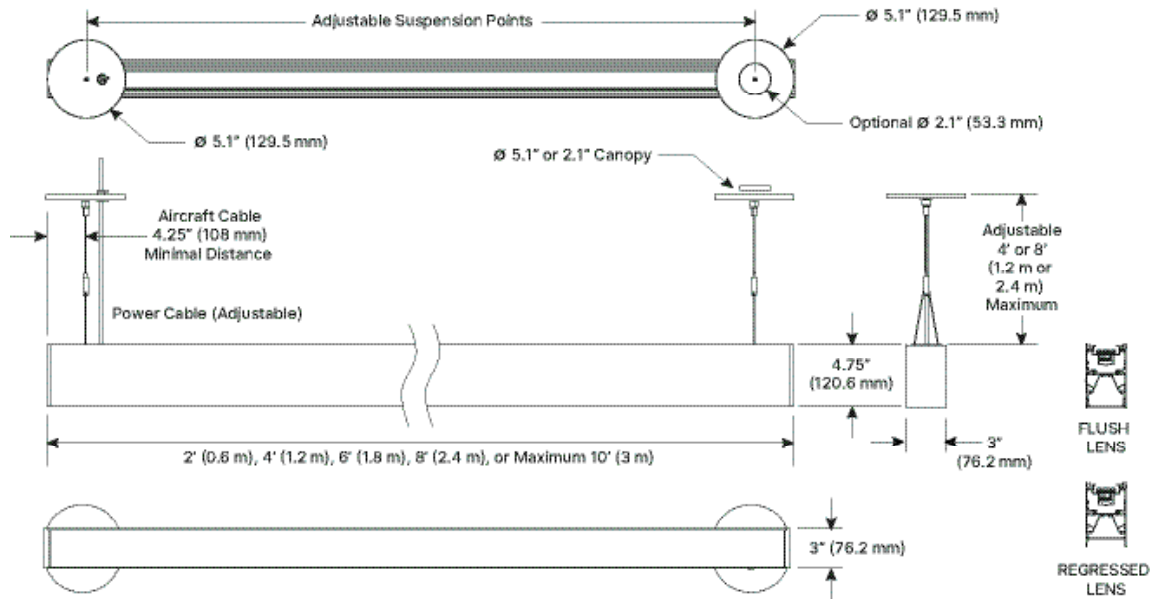

Length

Length Options 2', 4', 6', 8', 10' nominal, or custom within 3"

Finish

Housing Colors (Matte Finish)



White (RAL9003)



Black (RAL9005)



Gray (RAL7001)



Clear Anodized Effect



Custom RAL

Housing Material

6063-T5 extruded, recycled aluminum

Mounting Brackets

Sheet metal

End Cap

End Cap Option

Flat

End Cap Material

Machined or cast aluminum

Optic

Lens Options

Flush, Regressed, and Continuous Regressed

Lens Material

Patented SmartOptics® made from Acrylic (PMMA)

Voltage

Fixture Voltage (AC)

120–277 VAC and 347 VAC, 50/60 Hz

NOTES:

LED Drivers have adjustable output capability. A wide range of input watts/lumen output can be adjusted up or down on all models to suit a particular application. Always consult factory for the latest information.


Photometric data, IES files and all other information is available on request.

RENOVA products are constantly being improved; therefore the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.


LED SELECTION GUIDE

Prefix: PL4


S80: Standard 80+ CRI




S90: Standard 90+ CRI




HE80: High-Efficiency 80+ CRI




HE90: High-Efficiency 90+ CRI




HD95: High-Definition 95+ CRI




SUN: Full Spectrum "SunLike"



HCD: Human Centric Day



HCN: Human Centric Night



Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	-	-	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130
HCD	Human Centric Day	4000K	83	95	-	-	-	0.92	155
HCN	Human Centric Night	2700K	80	-	-	-	-	0.44	134

LPW Efficacy Conversion Chart


CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	-	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	-	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	-	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	-	0.87	0.96	1.00	1.04	N/A	N/A	N/A

OPTIC	BEAM PATTERN						
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
Flush Lens	●	●	●	●	●	●	●
Regressed Lens	●	●	●	●	●	●	●

DIRECT PHOTOMETRICS


Static White Light

DLAM: Lambertian




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 21
W/ft 5.28
LPW 142

DBW60: Batwing 60°




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 21
W/ft 5.17
LPW 145

DDA70: Double Asymmetric 70°




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.43
LPW 138

DA5025: Asymmetric 50° at 25° Tilt




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 21
W/ft 5.24
LPW 143

DA4005: Asymmetric 40° at 5° Tilt




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.39
LPW 139

DM55: Medium55°



Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.47
LPW 137


DN40: Narrow 40°



Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.51
LPW 136


INDIRECT PHOTOMETRICS

ILAM: Lambertian

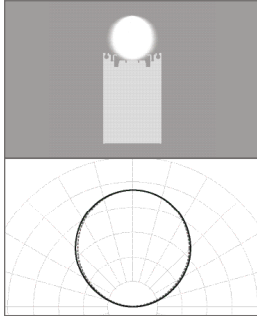


Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	19
W/ft	6.45
LPW	155

IBW120: Batwing 120°

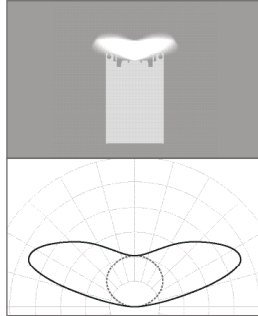


Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	25
W/ft	6.37
LPW	157

IFT150: FlatTop 150°




Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	27
W/ft	6.67
LPW	150

IA6040: Asymmetric 60° at 40° Tilt

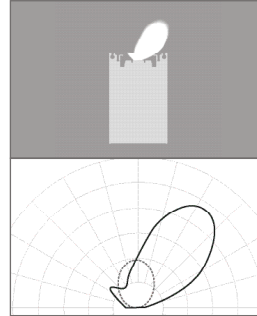

Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	27
W/ft	6.71
LPW	149

IA4560: Asymmetric 45° at 60° Tilt

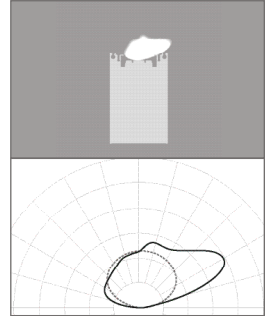


Length	48"
LED	HE90
CRI/CCT	90+/3500K
Lumens	4,000
lm/ft	1,000
Watts	26
W/ft	6.58
LPW	152

Standard Lengths & Continuous Runs

Maximum length of one fixture is 10'. Longer runs can be produced by joining sections. Customer approval of shop drawings is required prior to build of any non-standard length order.


Lens can be supplied in a maximum 250' roll length with Continuous FlatLens® Optics to be installed on-site for a seamless light surface.

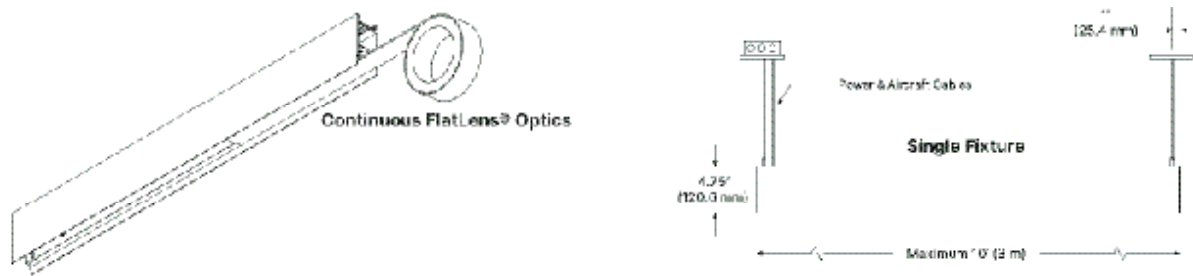


Standard Continuous Run




Emergency Battery Backup

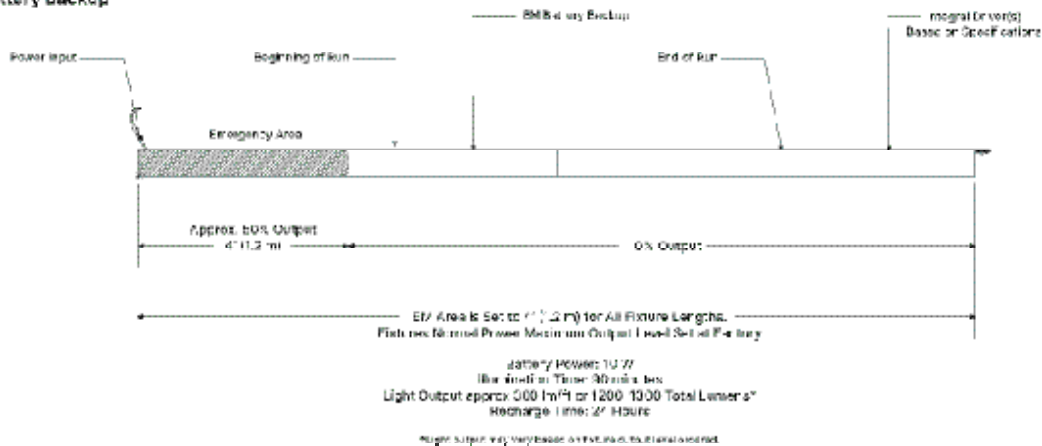

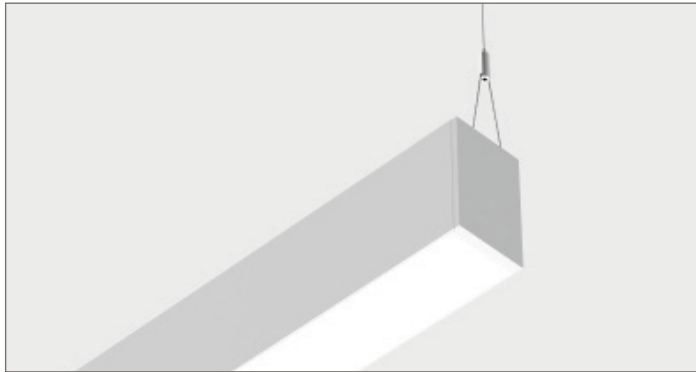

Flush Lens

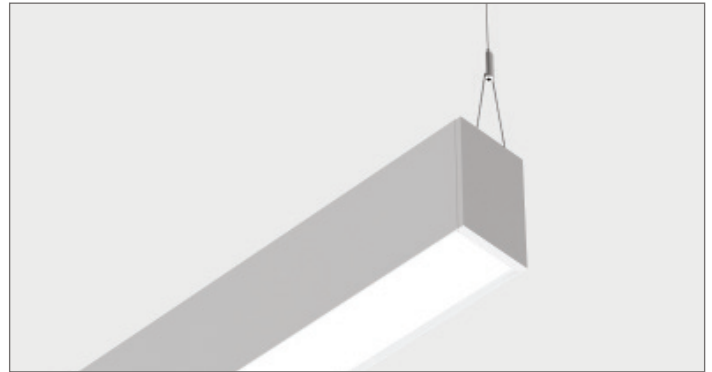

Regressed Lens

FIXTURE MOUNTING & CONNECTIONS

Mounting Type

T-Bar Mount

Installs into a ceiling grid system and mount on to typical T-Bar elements. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Drywall/J-Box Mount

Installs onto a surface via a junction box. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.

Canopy

Canopy Sizes & Shapes

2" and 5", Round Powder Coated Steel

Canopy Colors



White and Black

White and Black

White (RAL9003) Black (RAL9005)

Canopy Material

Power Cords

48" Cable Kit


96" Cable Kit

Mounting Options


Typically suspended at a distance of between 24" and 72". Supplied hardware includes:

- Cable length adjustable at fixture level
- Standard 96" cord length or custom length
- Internal brackets to eliminate light leakage at joints


DJ - Drywall/J-Box Mount

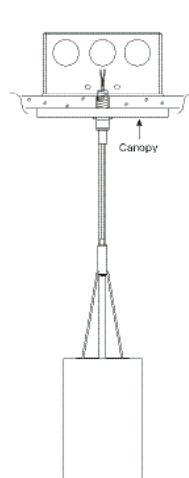

T1 - 9/16" Flat T-Bar Mount

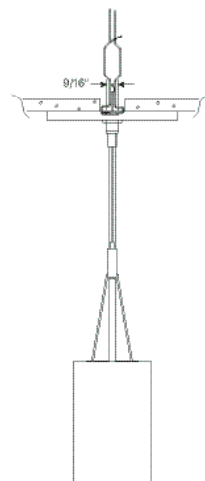

T2 - 9/16" Bolt Slot T-Bar Mount

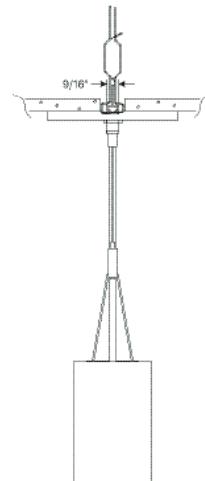

T3 - 15/16" Flat T-Bar Mount

