



Series:
NEMA 4X Wet Location LED Emergency Light (INDEM)

Fixture Type:
 Emergency Unit

Project Name	Fixture Type	Catalog #	Quantity
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>



Design Features / Specifications

Housing:

Housing is reinforced polycarbonate construction in white or black finish.
 Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
 Knockouts provided for conduit feed applications.

Listing & Ratings:

Five year warranty on all electronics and housing.
 Batteries prorated for two (lead acid) / five (NiCd) years.
 Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
 IP66 rated for Ingress protection.
 NEMA4X rated.
 UL certified for use in food service operations.
 UL listed for wet locations (0°C – 50°C on 15W and 10°C – 40°C on 36W / 54W models).

Mounting:

Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.

Illumination:

Two fully adjustable, ultra bright 3.6 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

Electrical:

Dual 120/277 voltage. Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
 Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
 6V/12V maintenance-free, rechargeable NiCd battery (15W models).
 6V/12V maintenance-free, rechargeable sealed lead acid battery (36W and 54W models).
 Offers 7.8Wh, 28.8Wh, 46.8Wh of remote capacity (6V/12V DC output) standard on the 15W, 36W and 54W models.
 Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
 Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours (36 hours on the 54W model).

Warranty:

Five year warranty on all electronics and housing. Battery pro-two years.

NEMA 4X Wet Location LED Emergency Light


Catalog # Description

Complete Units Ordering Information

Example: INDEM-6-15-W-SDT

INDEM	Model:	INDEM = NEMA 4X Wet Location Emergency Light
	Battery Voltage:	6 = 6 Volt 12 = 12 Volt
	Wattage:	15 = 15W 36 = 36W 54 = 54W
	Housing Color:	W = White B = Black
Options		SDT - Self Diagnostic CW - Cold Weather (15W only) TP - Tamper Proof

Dimensional Information

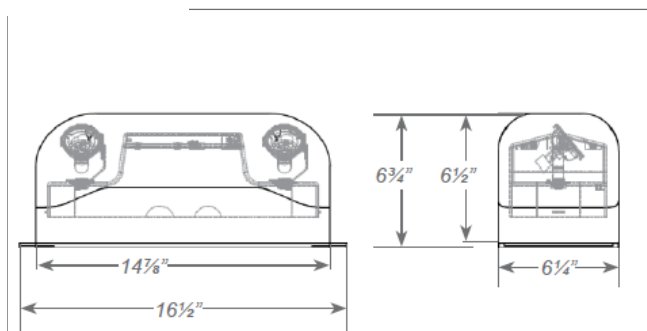

Note: RENOVA products are constantly being improved; therefore, the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.