

Project Name	Fixture Type	Catalog #	Quantity
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>



## Design Features / Specifications

### ILLUMINATION

- Sealed and gasketed weatherproof lamp heads with high performance chrome-plated metallized reflector and tempered glass lenses for optimal light distribution.
- Long lasting efficient ultra bright white LED lamp heads.
- 1.875W (15 LEDs x 0.125) per head.

### ELECTRICAL

- Dual 120/277 voltage, with 220Vac 50Hz option
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C.

### MOUNTING

- External mounting brackets for simplified wall mounting.
- Knockout for conduit applications.

### HOUSING

- Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish.
- Sealed and gasketed housing with hinged cover.
- Sealed test switch.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State
- Codes. UL Listed for wet locations (-20°C - 50°C).

### Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120v	277v	120v	277v
<b>LEDTFX</b>	2.7	2.7	0.03	0.013

Note: RENOVA products are constantly being improved; therefore, the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.

### Wet Location Remote Capable LED Emergency Unit

#### Catalog # Description


#### Complete Units Ordering Information

Example: LEDTFX

<b>LEDTFX</b>	<b>Model:</b>	LEDTFX = Emergency Steel Unit
	<b>Housing Color</b>	(blank) = Grey B = Black
<b>2</b>	<b># of Heads:</b>	2 = 2 Heads
<b>Options</b>		1. CEC - Title 20 Compliant 2. 220V - 220VAC 50Hz



### Dimensional Information

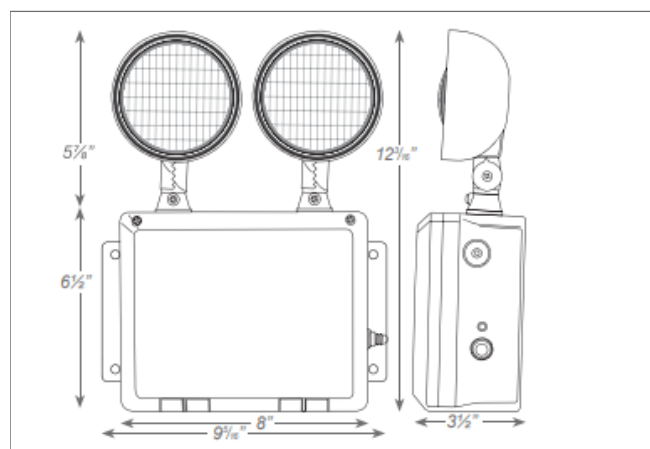

Weight = 7lbs